



ST 50 / ST 60

Elektrofahwerk
"normale Bauhöhe"





"Standard headroom"
electric trolley

Chariot électrique
"hauteur perdue normale"

Auswahltable: ↑ 15

Selection table: ↑ 15

Tableau de sélection : ↑ 15

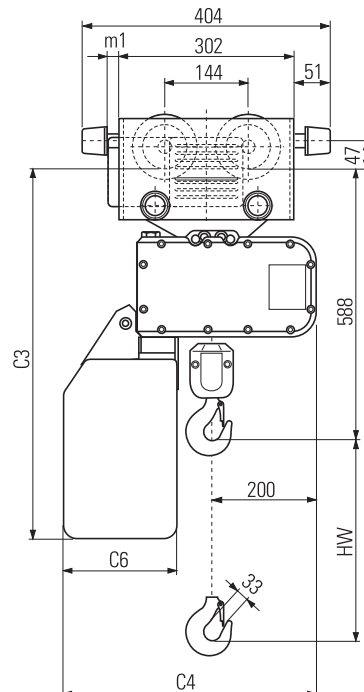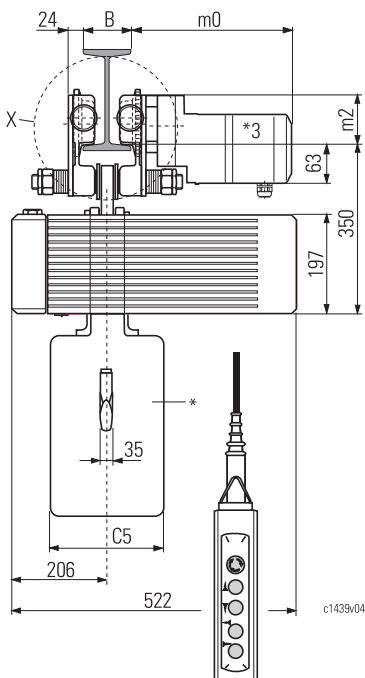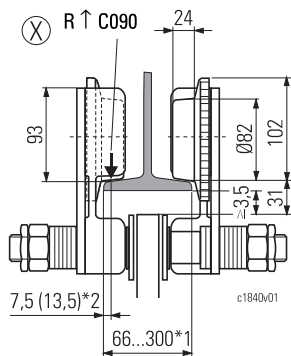

1/1

	KFN 32.32E					*	
=1/1							
HW	C3	C4	C5	C6			
[m]	[mm]						
12	765	466	300	210	K	Standard	
30	945	636	300	380	S		
50	1145	706	300	450	S		
8	664	466	296	210	T	Option	
12	784	466	296	210	T		
12	784	466	300	209	S		

1/1	
B *1	66 - 300
U	≥2800

1/1			
SU-A		SFC14	SFC14 +SFD
≥20/25 m/min		<20/25 m/min	
m0	318	344	442
m1	27		150
m2	93		155

* Material des Kettenspeichers

K = Kunststoff
S = Stahlblech
T = Textil

*1 Standard; bei Flanschbreite > 260 mm sind Führungsrollen erforderlich

*2 Bei geneigtem Flansch

*3 Entfällt bei Rollfahwerk

* Material of chain box

K = Plastic
S = Sheet metal
T = Fabric

*1 Standard; guide rollers necessary for flange width >260 mm

*2 With sloping flange

*3 N/a with push trolley

* Matériau du bac à chaîne

K = Matière plastique
S = Tôle d'acier
T = Textile

*1 Standard; galets de guidage nécessaires pour largeur d'aile >260 mm.

*2 Avec bride inclinée

*3 Se supprime sur chariot de direction par poussée