

VAN BEEST



FISHING PRODUCTS



your reliable partner

VAN BEEST

VAN BEEST B.V., manufacturer and supplier of wire rope and chain fittings. Registered trademarks **Green Pin®** and **Excel®**.

Dear customer,

For over 90 years the production of high tensile shackles has been our core business and competence. The designs and quality standards of our wire rope and chain accessories are the result of requirements put forward over the years by our customers in markets throughout the world.

We now have focussed on putting a package of products together specially for the fishing industry. Van Beest offers a wide range of fishing products in various types, sizes and materials. No matter if you need shackles, thimbles, connecting links, swivels or special hooks on your fishing vessel, you will find them in this brochure.

From the stock in our warehouse near Rotterdam we have the capacity to make speedy deliveries to wherever in the world the products are needed.

We are convinced that with this range of products you have found an excellent source that enables you to meet your needs in the marketplace.

Kind regards,

R.M. Meer
Vice President Sales



VAN BEEST B.V.

Head Office

P.O. Box 57
3360 AB Sliedrecht
The Netherlands

Industrieweg 6
3361 HJ Sliedrecht
The Netherlands

Telephone +31 184 41 33 00
Telefax +31 184 41 49 59
E-mail sales@vanbeest.nl

VAN BEEST USA, L.L.C.

PO Box 96529
Houston, Texas 77213
USA

1357 Sheffield Blvd.
Houston, Texas 77015
United States of America

Telephone +1 800 489 75 08
Telefax +1 713 674 82 24
E-mail sales.us@vanbeest.com

VAN BEEST GmbH & Co. KG

Industriestraße 9
D-59457 Werl
Germany

Telephone +49 2922 97 430
Telefax +49 2922 83 289
E-mail sales@vanbeest.de

VAN BEEST FRANCE S.A.S.

Route de Chanier
63250 Celles sur Durolle
France

Telephone +33 (0)4 73 51 89 51
Telefax +33 (0)4 73 51 56 15
E-mail sales@vanbeest.fr




your reliable partner

We reserve the right to make amendments on specifications mentioned in this catalogue without prior notification. Specifications show general compliance with the various standards and should not be taken to meet all terms of the contract or purchase order.

Chamber of Commerce Rotterdam, Registration Number 23009317
VAT Number NL 0091.33.835.B01

©copyright 2015 VAN BEEST B.V., Sliedrecht
All Rights Reserved




G-4164

Green Pin® Trawling Shackles

bow shackles with square headed screw pin

- **Material** : bow and pin high tensile steel, Grade 6, quenched and tempered
- **Safety Factor** : MBL equals 6 x WLL
- **Standard** : EN13889 and
meets performance requirements of US Fed. Spec. RR-C-271, Grade A
- **Finish** : hot dipped galvanized
- **Certification** : at no extra charges this product can be supplied with a works certificate, 3.1 material certificate, manufacturer test certificate and/or EC Declaration of Conformity

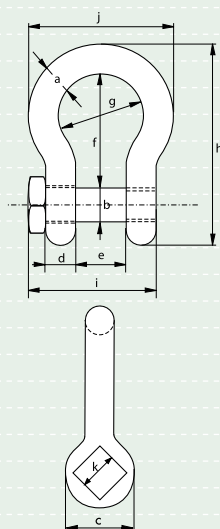


working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length bow	length bolt	width bolt	width bolt head	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	kg
2	13.5	16	34	13	22	51	32	89	57.5	58	22	0.34
3.25	16	19	40	16	27	64	43	110	71	75	27	0.63
4.75	19	22	46	19	31	76	51	129	82	89	32	1
6.5	22	25	52	22	36	83	58	144	93	102	32	1.44
8.5	25	28	59	25	43	95	68	164	108	118	36	2.21
9.5	28	32	66	28	47	108	75	185	120	131	41	3.18
12	32	35	72	32	51	115	83	201	137	147	50	4.32
13.5	35	38	80	35	57	133	92	227	149	162	50	5.67
17	38	42	88	38	60	146	99	249	164	175	60	7.36
25	45	50	103	45	74	178	126	300	192	216	60	12.38


Green Pin® Trawling Shackles

dee shackles with square headed screw pin


- **Material** : bow and pin high tensile steel, Grade 6, quenched and tempered
- **Safety Factor** : MBL equals 6 x WLL
- **Standard** : EN13889 and
meets performance requirements of US Fed. Spec. RR-C-271, Grade A
- **Finish** : hot dipped galvanized
- **Certification** : at no extra charges this product can be supplied with a works certificate, 3.1 material certificate, manufacturer test certificate and/or EC Declaration of Conformity





G-4154

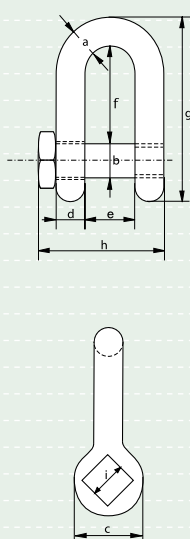

working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	length bow	length bolt	width bolt	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
2	13.5	16	34	13	22	43	81	57.5	22	0.32
3.25	16	19	40	16	27	51	97	71	27	0.58
4.75	19	22	46	19	31	59	112	82	32	0.92
6.5	22	25	52	22	36	73	134	93	32	1.33
8.5	25	28	59	25	43	85	154	108	36	2.03
9.5	28	32	66	28	47	90	167	120	41	2.88
12	32	35	72	32	51	94	180	137	50	3.96
13.5	35	38	80	35	57	115	209	149	50	5.24
17	38	42	88	38	60	127	230	164	60	6.8
25	45	50	103	45	74	149	271	192	60	11.22



G-4169



P-4170



Green Pin® Sunken Hole Shackles

bow shackles with square sunken hole screw pin

- **Material** : bow and pin high tensile steel, Grade 6, quenched and tempered
- **Safety Factor** : MBL equals 6 x WLL
- **Standard** : EN13889 and
meets performance requirements of US Fed. Spec. RR-C-271, Grade A
- **Finish** : hot dipped galvanized
- **Certification** : at no extra charges this product can be supplied with a works certificate, 3.1 material certificate, manufacturer test certificate and/or EC Declaration of Conformity
- **Note** : key for unscrewing the pin must be ordered separately

working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length bow	length bolt	width	size hole	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	kg
2	13.5	16	34	13	22	51	32	89	51	58	11	0.31
3.25	16	19	40	16	27	64	43	110	63	75	11	0.56
4.75	19	22	46	19	31	76	51	129	74	89	11	0.98
6.5	22	25	52	22	36	83	58	144	85	102	13	1.46
8.5	25	28	59	25	43	95	68	164	99	118	13	2.18
9.5	28	32	66	28	47	108	75	185	110	131	17	3.06
12	32	35	72	32	51	115	83	201	122	147	17	4.24
13.5	35	38	80	35	57	133	92	227	135	162	17	5.59
17	38	42	88	38	60	146	99	249	145	175	17	7.37




Green Pin® Sunken Hole Shackles

dee shackles with square sunken hole screw pin




G-4159


- **Material** : bow and pin high tensile steel, Grade 6, quenched and tempered
- **Safety Factor** : MBL equals 6 x WLL
- **Standard** : EN13889 and
meets performance requirements of US Fed. Spec. RR-C-271, Grade A
- **Finish** : hot dipped galvanized
- **Certification** : at no extra charges this product can be supplied with a works certificate, 3.1 material certificate, manufacturer test certificate and/or EC Declaration of Conformity
- **Note** : key for unscrewing the pin must be ordered separately




working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	length	length bolt	size hole	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
2	13.5	16	34	13	22	43	81	51	11	0.34
3.25	16	19	40	16	27	51	97	63	11	0.6
4.75	19	22	46	19	31	59	112	74	11	0.98
6.5	22	25	52	22	36	73	134	85	13	1.26
8.5	25	28	59	25	43	85	154	99	13	2.14
9.5	28	32	66	28	47	90	167	110	17	3.05
12	32	35	72	32	51	94	180	122	17	3.56
13.5	35	38	80	35	57	115	209	135	17	5.17
17	38	42	88	38	60	127	230	145	17	6.84




P-4170





P-3764




Fishing Shackles


bow shackles with square head screw pin

- **Material** : mild steel
- **Safety Factor** : MBL equals 5 x WLL
- **Finish** : painted blue

working load limit	diameter bow	diameter pin	diameter eye	width inside	length inside	width bow	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	kg
1.5	13	16	32	25	48	36	0.37
2.5	16	20	40	32	64	48	0.71
3	20	22	48	38	79	60	1.24
4	22	25	53	44	87	66	1.68
5	25	28	60	51	100	75	2.42
6.5	28	32	67	56	114	86	3.42
8	32	36	71	64	126	96	4.85
9	36	38	76	70	140	105	6.32



P-3754

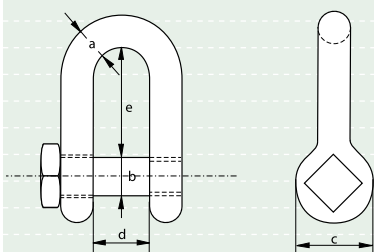


Fishing Shackles


dee shackles with square head screw pin

- **Material** : mild steel
- **Safety Factor** : MBL equals 5 x WLL
- **Finish** : painted blue

working load limit	diameter bow	diameter pin	diameter eye	width inside	length inside	weight each
tons	a mm	b mm	c mm	d mm	e mm	kg
1.5	13	16	32	25	48	0.36
2.5	16	20	40	32	64	0.69
3	20	22	48	38	75	1.18
4	22	25	53	44	83	1.61
5	25	28	60	51	100	2.35
6.5	28	32	67	56	104	3.22
8	32	36	71	64	120	4.63
9	36	38	76	70	131	5.96



S-1164




Commercial Shackles


bow shackles with square head screw pin

- **Material** : mild steel, untreated, Grade 3
- **Finish** : self coloured
- **Note** : not to be used for lifting applications

diameter bow	diameter pin	diameter eye	width inside	length inside	width bow	weight per 100 pcs
a mm	b mm	c mm	d mm	e mm	f mm	kg
6	6	12	12	24	18	2.7
8	8	16	16	32	24	6.4
10	10	20	20	40	30	12.5
11	11	22	22	44	33	16.6
12	12	24	24	48	36	21.6
14	14	28	28	56	42	34.3
16	16	32	32	64	48	51.2
19	19	38	38	76	57	100
22	22	44	44	88	66	133
25	25	50	50	100	75	195
28	28	56	56	112	84	275
32	32	64	64	128	96	410
38	38	76	76	152	114	686



S-1154

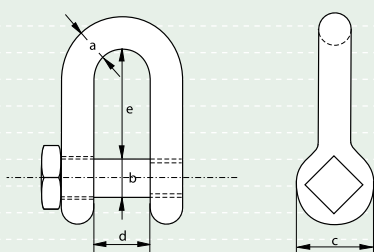


Commercial Shackles


dee shackles with square head screw pin

- **Material** : mild steel, untreated, Grade 3
- **Finish** : self coloured
- **Note** : not to be used for lifting applications

diameter bow	diameter pin	diameter eye	width inside	length inside	weight per 100 pcs
a mm	b mm	c mm	d mm	e mm	kg
6	6	12	12	24	2.6
8	8	16	16	32	6.17
10	10	20	20	40	12
11	11	22	22	44	16
12	12	24	24	48	20.8
14	14	28	28	56	33.1
16	16	32	32	64	49.4
19	19	38	38	76	96.4
22	22	44	44	88	128
25	25	50	50	100	188
28	28	56	56	112	265
32	32	64	64	128	395
38	38	76	76	152	661



S-1170

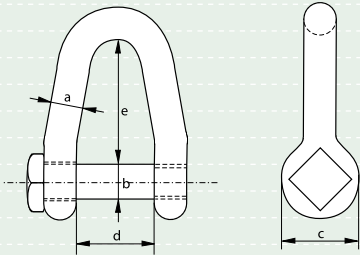


Commercial Shackles


danlino V shackles with square head screw pin

- **Material** : mild steel, untreated, Grade 3
- **Finish** : self coloured
- **Note** : not to be used for lifting applications

diameter bow	diameter pin	diameter eye	width inside	length inside	weight per 100 pcs
a mm	b mm	c mm	d mm	e mm	kg
32	32	64	78	120	470

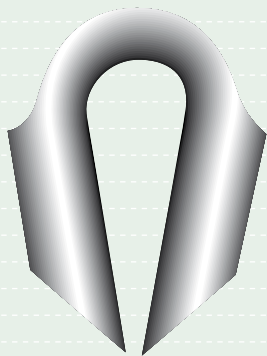

P-6190





Thimbles

tubular type

- **Material** : mild steel
- **Finish** : painted
- **Certification** : a works certificate can be supplied upon request

diameter wire rope	diameter a	length b	width inside c	thickness d	height e	weight each
mm	mm	mm	mm	mm	mm	kg
10	12	90	23	4	8	0.25
12	15	105	27	5	10	0.42
14	17	115	27	5	10	0.5
16	19	120	32	5	12	0.6
18	22	140	35	5	15	0.75
22	25	180	45	6	16	1.4
24	28	180	45	7	16	1.75
26	30	195	47	7	18	2
32	35	215	60	7	22	2.4
36	40	212	70	9	36	3
38	45	260	70	7	27	3.3
44	50	280	75	7	28	4.06


P-6860Y
P-6860R

Green Pin® connecting links


for connecting Grade 8 chain-slings

- **Material** : grade 8, alloy steel
- **Safety factor** : MBL equals 4 x WLL
- **Standard** : generally to EN 1677-1
- **Finish** : painted yellow or red
- **Certification** : test certificates can be supplied upon request

working load limit	for chain dia- meter	dia- meter	width outside	width inside	length inside	length inside	dia- meter eye	width inside	weight each
tons	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg
1.12	6	8	42	11	20	52	11	15	0.14
2	7-8	9	53	14	21	55	13	19	0.15
3.2	10	10	66	18	24	64	18	25	0.32
5.4	13	14	83	21	31	85	24	30	0.7
8.2	16	17	103	25	40	105	28	36	1.29
12.8	18-20	21	120	33	50	129	33	43	2.08
15.5	22	23	143	39	54	140	37	53	3.33
21.6	26	26	160	44	57	153	43	59	4.92
32.8	32	39	197	51	64	174	55	68	8.2



G-7713




Green Pin® swivels

Eye - Eye

- **Material** : high tensile steel, quenched and tempered
- **Safety factor** : MBL equals 5 x WLL
- **Standard** : generally to US Federal Spec. RR-C-271, Type VII, Class 2
- **Finish** : hot dipped galvanized
- **Certification** : test certificates can be supplied upon request

working load limit	diameter	length outside	width outside	length inside	width inside	length inside	length	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg
0.39	6	87	32	18	19	27	75	0.1
0.57	8	106	41	21	25	32	90	0.18
1.02	10	129	51	24	32	38	109	0.32
1.6	13	164	64	33	38	51	138	0.6
2.4	16	199	76	40	44	60	167	1.13
3.3	19	221	89	44	51	67	183	1.82
4.5	22	257	102	52	57	78	213	2.83
5.7	25	295	114	59	64	89	245	4.06
8.2	32	337	143	68	80	94	273	7.43
20.5	38	501	178	102	102	150	425	20.8

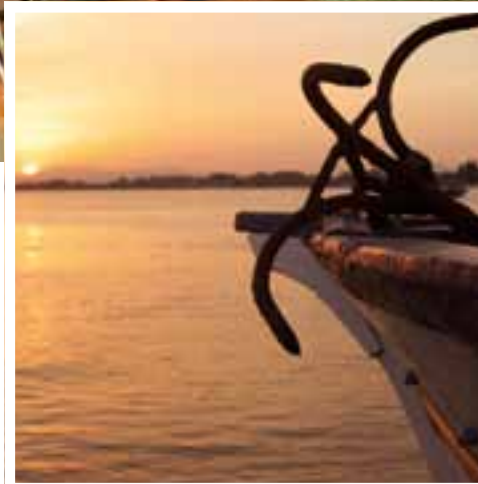



VAN BEEST B.V.
 P.O. Box 57
 3360 AB Sliedrecht
 The Netherlands
 Industrieweg 6
 3361 HJ Sliedrecht
 Telephone +31 184 41 33 00
 Telefax +31 184 41 49 59
 E-mail sales@vanbeest.nl
 Internet www.vanbeest.nl

Member of Van Beest International

